




NOVOTEST
QUALITY TESTING DEVICES

Ultrasonic Flaw Detector NOVOTEST UD2301



NEW!
7"
**TOUCH
SCREEN**

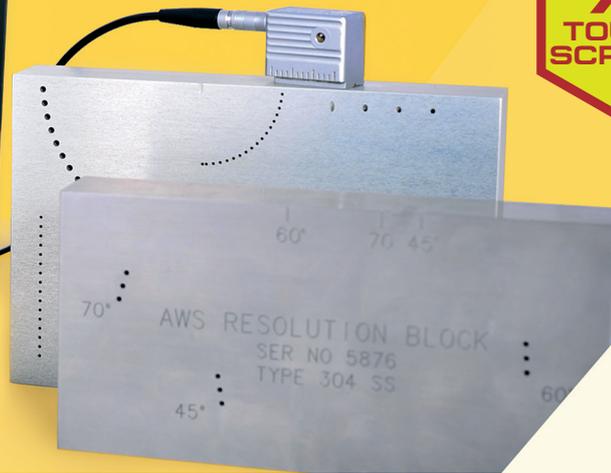

Ultrasonic Flaw Detector NOVOTEST UD2301 is designed to detect defects, such as continuity and uniformity of materials in products and welded joints, to measure the depth and position of their occurrence, thickness measurements, measurements of velocity and attenuation of ultrasonic waves (ultrasonic) in the material.

Ultrasonic Flaw Detector NOVOTEST UD2301 with large touch screen display is the best choice for expert ultrasonic testing. Powerful, lightweight and portable, the ergonomic impact-resistant metal casing. The flaw detector UD2301 allows to measure the thickness of the product with great accuracy, the signal to be in the form of A-and B-scans and has all the features of the full documentation of control.

The advantages of Ultrasonic Flaw Detector NOVOTEST UD2301

- ✓ Frequency range with continuously adjustable from 0.2 to 10MHz
- ✓ Two independently controlled gate (A and B)
- ✓ Automatic or manual construction of the TCG curve (32 points)
- ✓ Two types of representations of signals: the detection and radio
- ✓ Build and handling A, B scans
- ✓ Modes: the envelope, freeze and display of the beam
- ✓ Large 7" touch screen display
- ✓ Memory of the results
- ✓ Communication with PC
- ✓ Further processing of the results using a specialized computer program

www.novotest.biz

Detailed specifications of Ultrasonic Flaw Detector NOVOTEST UD2301

Range	min.: 0 - 6 μ s max.: 0 - 1000 μ s step - 25 ns
Display shift (delay)	from 0 μ s to 1000 μ s step - 25 ns
MAX length of tested material	up to 6000 mm (echo mode) for steel
Velocity range	1000 - 9999 m/s
Delay in the prism	0 - 100 μ s step - 25 ns
Damping	50 Ohm
Input impedance	50 Ohm / 600 Ohm
Pulse mode	RF pulse with amplitude of 100, 200 or 300V, With variable length from 25 to 500 ns, step - 25 ns
PRF	automatically optimized from 10 to 100Hz
Analog bandwidth	wideband 0.4-20 MHz (-6 dB)
Gain control range	125 dB, step - 0,5 dB
Time control gain (TCG)	range up to 70 dB, 12 dB / μ s with the construction of the curve through 16 reference points, entered by hand or by the control reflectors
Amplitude-Distance Curve (DAC)	drawing through 16 points, height adjustable
Zone control (gates)	two independent areas, the beginning and width are change at all scan range; levels of limits are set from 0 to 100% of display height; individual logic of detection defects.
Detection	positive or negative half-wave, complete, the radio signal (at all range of scan), B-scan
Cutoff	compensated, 0 - 90% of screen height
Automatic Alarm of defects	light logic of detection defect in zone for each zone individu- ally and sound individual logic detection defect at the zone
Time intervals measurement	from 0 to a first signal in the zone or between signals in the zones to the front or to the maximum signal
Measurement of amplitude	in dB relative to threshold level in the zone; in dB relative to the reference signal; in dB relative to the amplitude-distance curve
Display	7" touch screen, 155x85 mm
Memory	limited of SD cards capacity
Interface	USB, Bluetooth (optional)
Connectors of probes	2 Lemo
Battery	Li-Ion 12 a/h
Battery life	up to 10 hours
External power supply	220V, 50Hz AC
Supply voltage	5V
Operating temperature range	from -30 °C to + 55 °C
Dimensions (H x W x L)	50x150x250 mm
Weight	1.1 kg